
SAMPLE · raftersuite.com

Greenbow Construction Co.

Oak Hill Farm Shop J-0003

FOUNDATION PLAN

Powered by RafterSuite™
From First Quote to Final Frame
raftersuite.com

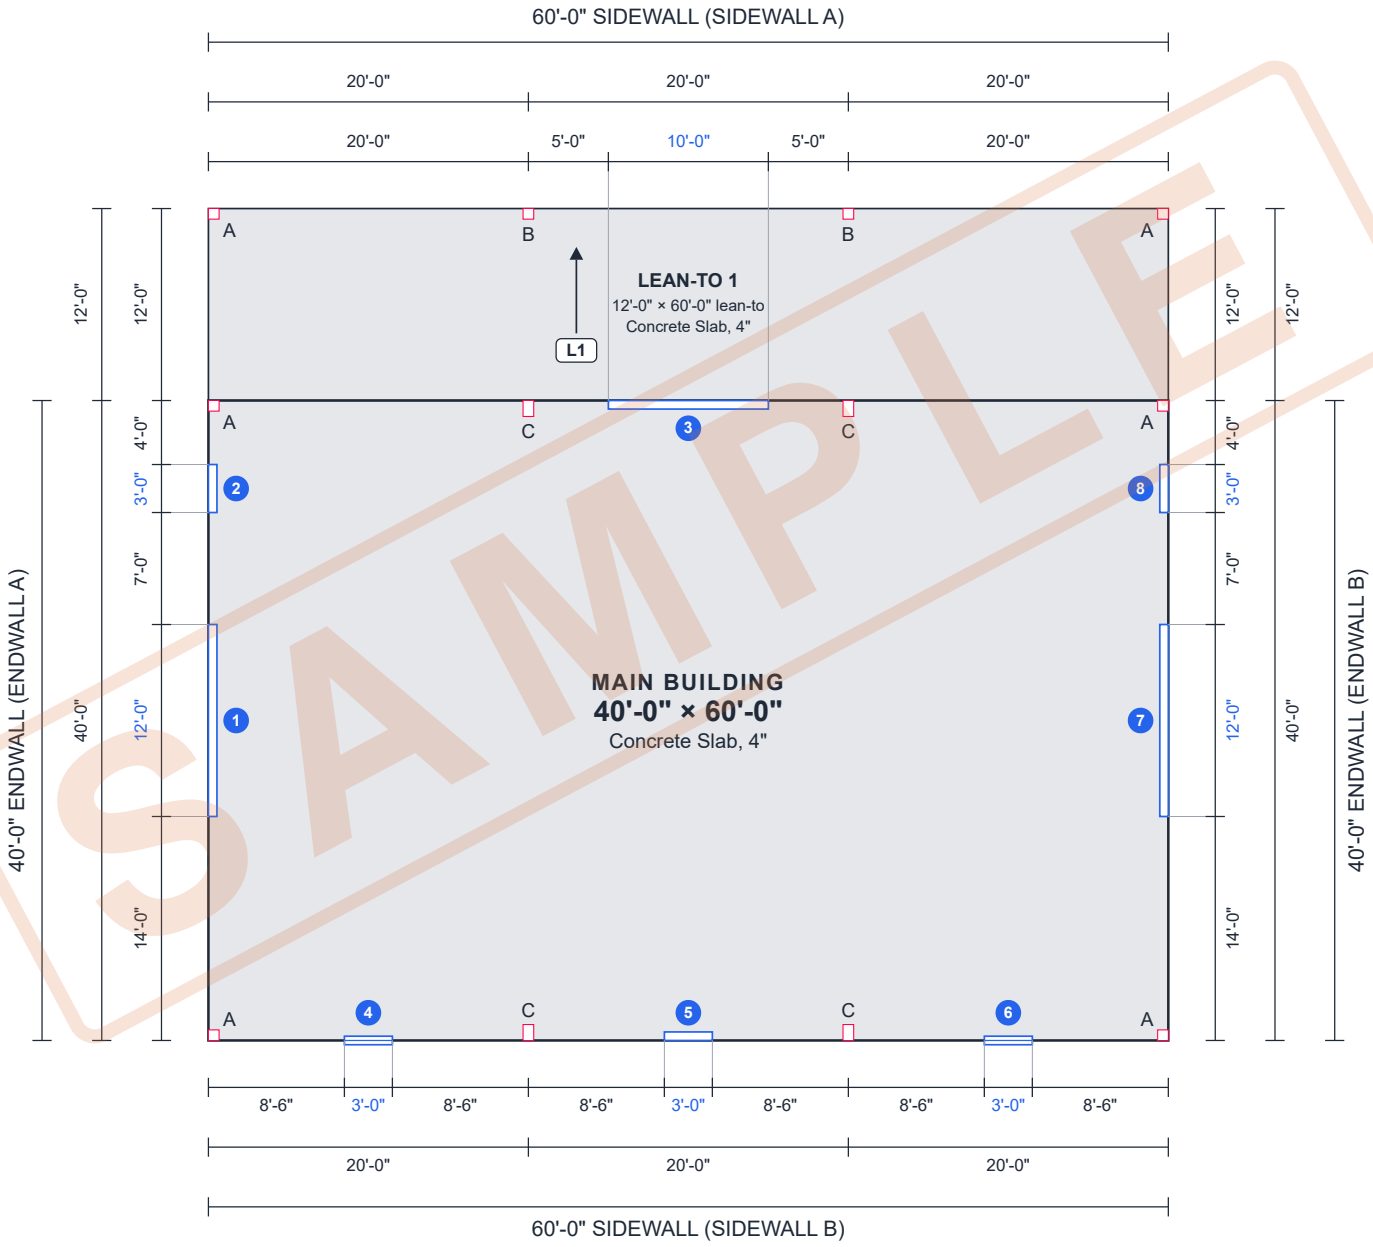

SAMPLE

Dimensions in feet and inches. Do not scale from this drawing.

Preliminary layout — confirm dimensions before construction.
Slab & pier levels: see sheet 2.

Greenbow Construction Co.

Oak Hill Farm Shop J-0003

FOUNDATION PLAN

Powered by RafterSuite™
From First Quote to Final Frame
raftersuite.com

OPENINGS KEY

1	Roll-up door	12'-0" × 12'-0"	Endwall A
2	Walk door	3'-0" × 7'-0"	Endwall A
3	Roll-up door	10'-0" × 10'-0"	Sidewall A
4	Window	3'-0" × 4'-0"	Sidewall B
5	Walk door	3'-0" × 7'-0"	Sidewall B
6	Window	3'-0" × 4'-0"	Sidewall B
7	Roll-up door	12'-0" × 12'-0"	Endwall B
8	Walk door	3'-0" × 7'-0"	Endwall B

The numbers match the numbered openings on the foundation plan (sheet 1).

SLAB & PIER LEVELS

L1 **LEAN-TO 1 — Sidewall A**
SLAB 1-1/2" BELOW MAIN SLAB, SLOPES 1-1/2" AWAY

Columns and posts standing on a lower slab or pier are longer by the same amount; the material list includes it.

The L tags match the tagged areas on the plan (sheet 1).

SAMPLE


SAMPLE · raftersuite.com

BASEPLATE DETAILS

The letters match the baseplates on the foundation plan (sheet 1). Grid: 1" squares, 1/4" lines.

Baseplate - A


8"x8" Endwall
1/2" plate · 1-1/16" holes

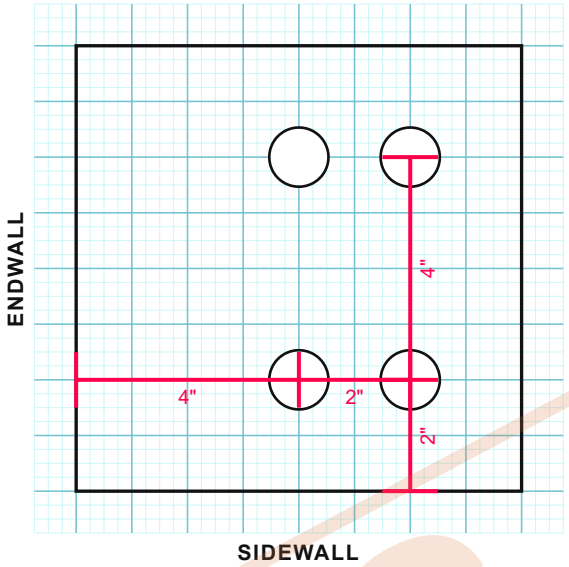

6 required — 4 endwall corners · 2 lean-to corners
Other corners: mirror image

Baseplate - B


8"x8" Internal
1/2" plate · 1-1/16" holes

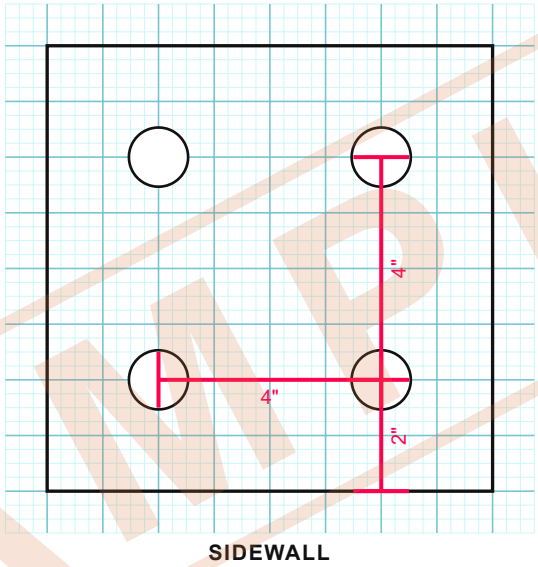

2 required — 2 lean-to posts

Baseplate - C

8"x12" Internal
1/2" plate · 1-1/16" holes

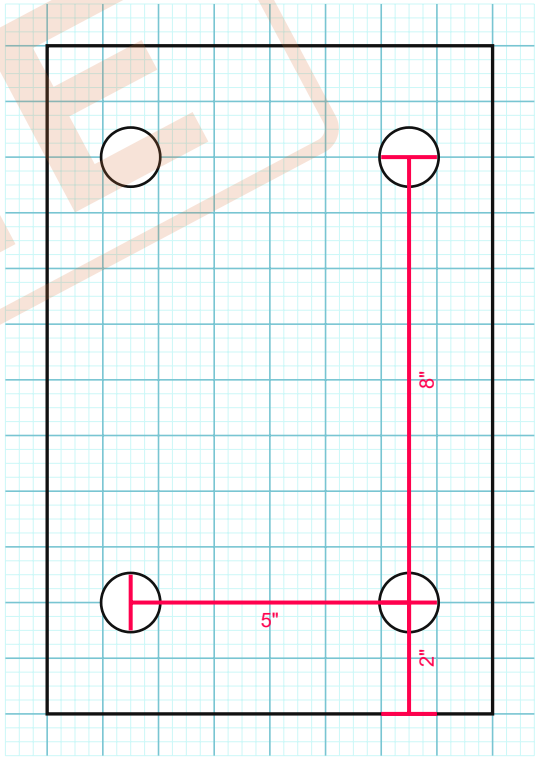

4 required — 4 interior columns

SAMPLE